


KeeService Company has established itself as a leader in innovation and dependability in the waste equipment industry. From engineering to production, KeeService Company is committed to providing top quality equipment and service.

KeeService Company's neat, clean appearance, in both the rear loading model and the front loading model, blends attractively with its surroundings.

With the KSC's low 40" loading height, even the most petite person can handle the job. Close the lid, insert the key in the Power Pack console and turn the KSC's powerful hydraulic system on. The packing blade automatically cycles. Incorporated in the KSC design are unique safety features that prevent the compaction cycle from operating while the loading chamber lid is open.

Another important safety back-up feature is a mushroom STOP button on the Power Pack console that will halt operation at any point in the cycle. The KeeService Company's key-operated system also allows the charge lid to be locked for controlled access.

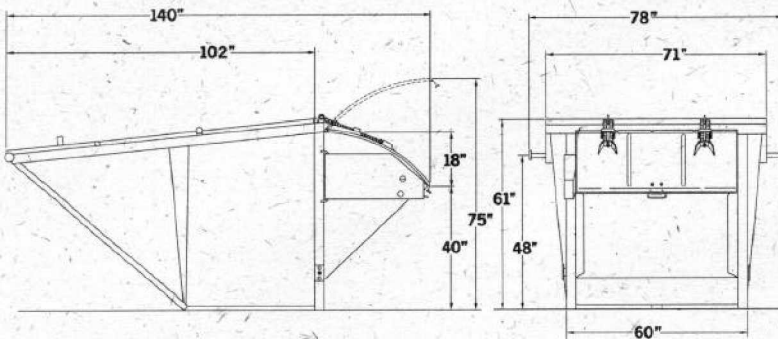

FEATURES

CONTAINER CAPACITY 6 Cubic Yards
 OVERALLDIMENSIONS Length 140" Width 78" Height 61"
 APPR. SHIPPING WEIGHT WITH POWER PACK 2,380 Lbs.

KS6R SELF CONTAINED COMPACTOR (REAR LOADING)


SPECIFICATIONS

LOADING CHAMBER SIZE	Mfgs. Rating 1 .O Cubic Yard
LOADING CHAMBER OPENING	Length 27 1/2" Width 53 1/2"
LOADING CHAMBER HEIGHT	40"
RAM FACE	Width 53" Height 46"
RAM PENETRATION	0" - 13"
PACKING PRESSURE	Normal 1550 PSI Maximum 1750 PSI
PACKING FORCE	Normal 21,900 Lbs. Maximum 24,700 Lbs.

STANDARD POWER PACK



- | | |
|------------------------|---|
| 1) Electric Motor | 3HP 1750 RPM TEFC |
| 2) Control Panel | 208/230/460 Volts 3-Phase,
60 Hertz
Key Start Switch & Stop Buttons |
| 3) Hydraulic Pump | 5GPM HI-LO with 200 Mesh
Screen Suction Filter |
| 4) Hydraulic Reservoir | 13 Gallons |
| 5) Hydraulic Fluid | Dextron II ATF |
| 6) Power Pack Cover | Protective Metal Cover with
Hydraulic Hose Storage Slot |
| 7) Hydraulic Hoses | 12' with Quick Disconnect
Industrial Hydraulic Couplers |

HYDRAULIC CYLINDERS	2 - 3" x 16"
CYCLE TIME	26 Seconds




Compact Weather Proof 3 Phase and/or Single Phase Power Unit (UL Approved)

Loading Chamber Lid, Spring Assisted for Ease of Opening

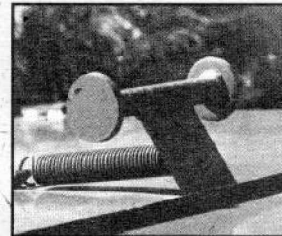

Rear Load: Cable Controlled Lid Unlatching and Lift Release

Optional Wheel Mounting Kit



KEE Service COMPANY

Kee Service Company
 1515 American Way
 Cedar Hill, TX 75114
 Phone 972-293-0855 / Fax 972-292-9691

Continued product improvement is a KSC goal. Therefore, we reserve the right to make any changes in illustrations, specifications, equipment and prices.
 All KSC Compaction Units conform to applicable ANSI 2245.2 safety standards.



Member of

W E M I

