


KeeService Company has established itself as a leader in innovation and dependability in the waste equipment industry. From engineering to production; KeeService Company is committed to providing top quality equipment and service.

The KS6S Series models offer a large 100" X 57" charge chamber opening, capable of accepting large, bulky refuse, ideal for the rapidly growing Transfer Station applications. The KP6S's standard 18" ram penetration, with a standard duty ram force of 66,450#, is one of the largest in the industry, providing superior compaction rates.

With the KS6S Series of Models you can expect a clean, fast and trouble free operation of compaction and waste removal from KeeService Company.

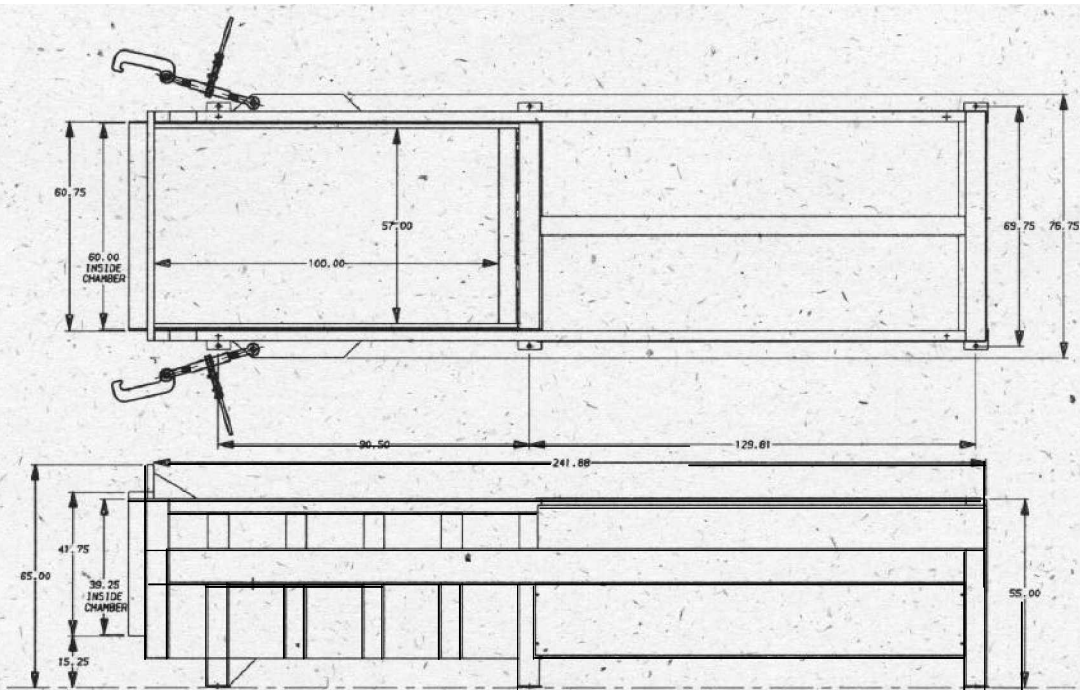

KS6S-6YD. STATIONARY COMPACTION SPECIFICATIONS

HEAVY DUTY (SH)

Cleartop Opening	100" x 57"
Ram Penetration	18"
Cylinder Size	6D x 120 Stroke
Floor	.50 AR Plate
Compactor Sides	.38 Plate
Ram Top	.38 Plate
Ram Face	.50 Plate
Power Pack HP	20 HP
Cycle Time	26 Sec. (Hi-Lo)
Norm. Force	66,450#
Max. Force	70,650#
Norm. PSI	1,850 PSI
Max. PSI	2,500 PSI
Pump Size	48 GPM Hi-Lo 24 GPM (single Stage) Optional 50 Gallons
Res. Size	75 Gallons
Remote	STD

OPTIONAL

EXTRA HEAVY DUTY (SEH)

Cylinder Size	(2) 6D x 120 Stroke
Cycle Time	52 Sec.
Power Pack	20 HP Hi-Lo 48 GPM
Norm. Force	104,600#
Max. Force	117,600#
Norm. PSI	1,850 PSI
Max. PSI	2,100 PSI
Floor	.75 Plate
Ram Face	.75 Plate
Ram Top	.50 Plate
Compactor Sides	.38 Plate
Added Reinforced Sides	

KEE Service
COMPANY

Kee Service Company

1515 American Way

Cedar Hill, TX 75114

Phone 972-293-0855 / Fax 972-292-9691

Continued product improvement is a KSC goal. Therefore, we reserve the right to make any changes in illustrations, specifications, equipment and prices. All KSC Compaction Units conform to applicable ANSI 2245.2 safety standards.

